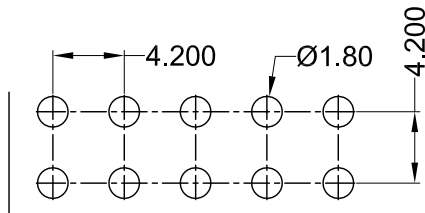
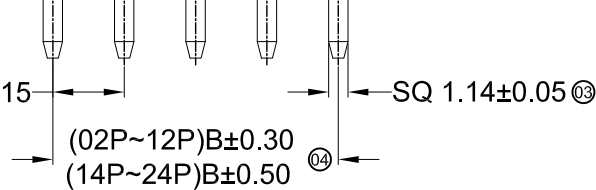
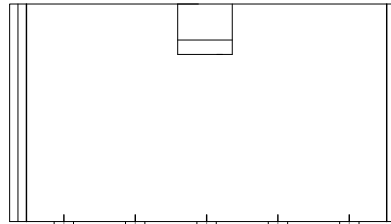
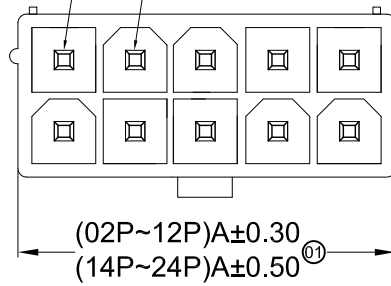
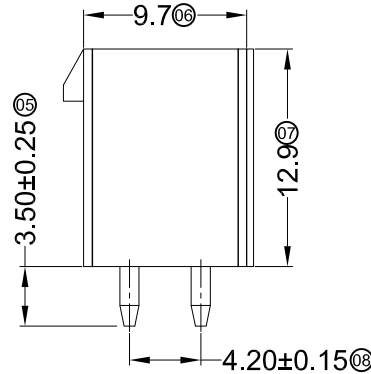
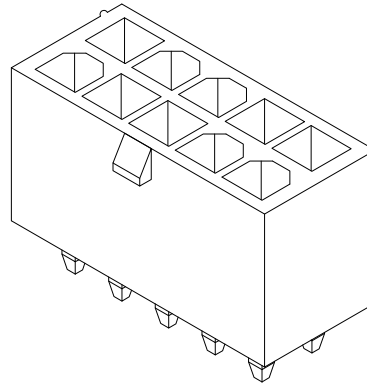


Circuit 1 Circuit 2

Recommended P.C.B Layout
General Tolerance±0.05


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*01	5.40	--	2*07	30.60	25.20
2*02	9.60	4.20	2*08	34.80	29.40
2*03	13.80	8.40	2*09	39.00	33.60
2*04	18.00	12.60	2*10	43.20	37.80
2*05	22.20	16.80	2*11	47.40	42.00
2*06	26.40	21.00	2*12	51.60	46.20

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 W V X-2*XX X-XX XX XX - A
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: W-WAFER
③ Welding Board Angle: V- Stright 180°;
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-2*01P~2*12P
⑥ Plug the Pin & Special No.:
⑦ Material: N0-PA66 94V-0; N2-PA66 94V-2
⑧ Plating Category:
SN-Bright tin plating 80u" Min Ni 30u"Min
V01-All Gold-Plated Gold Flash
⑨ Color: Blank-Natural Color BK-Black GY-Gray
⑩ A: Numbering

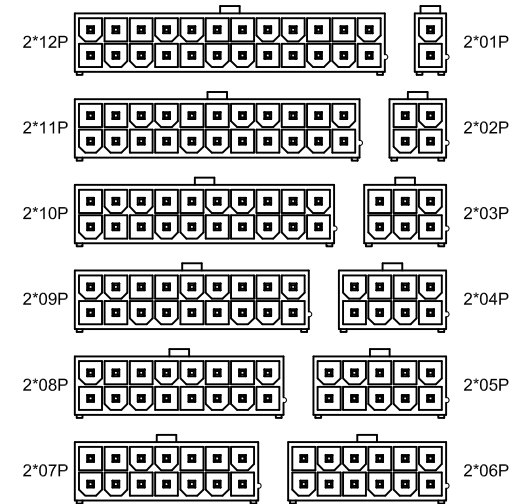


9357WV-2*XX-N0V01-A	Nylon 66 UL 94V-0	Natural Color	Brass	Gold-Flash	9357H
9357WV-2*XX-N0SN-A	Nylon 66 UL 94V-0	Natural Color	Brass	Tin-Plated	
9357WV-2*XX-N2V01-A	Nylon 66 UL 94V-2	Natural Color Black /Gray	Brass	Gold-Flash	
9357WV-2*XX-N2SN-A	Nylon 66 UL 94V-2	Natural Color Black /Gray	Brass	Tin-Plated	
PART NO	Material	Color	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL TOLERANCE

.X	±0.30
.XX	±0.20
.XXX	±0.10

PROJECT

 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2017/05/03

PART NO. 9357WV-2*XX-XXXX-A

TITLE 4.20 mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1:1	A-053	G

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

RoHS

TEL:0769-82285488

Circuit 1

Last Circuit

 $(02P \sim 12P)A \pm 0.30$
 $(14P \sim 24P)A \pm 0.50$ $\varnothing 4.20 \pm 0.15$ SQ 1.14 ± 0.05 $(02P \sim 12P)B \pm 0.30$
 $(14P \sim 24P)B \pm 0.50$ Recommended P.C.B Layout
General Tolerance ± 0.05


Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*01	5.40	--	2*07	30.60	25.20
2*02	9.60	4.20	2*08	34.80	29.40
2*03	13.80	8.40	2*09	39.00	33.60
2*04	18.00	12.60	2*10	43.20	37.80
2*05	22.20	16.80	2*11	47.40	42.00
2*06	26.40	21.00	2*12	51.60	46.20

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 10A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

9357 W V X-2*XX H-XX XX XX -B
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩

- ① Series No.
② Category: W-WAFER
③ Welding Board Angle: V- Stright 180°;
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-2*01P~2*12P
⑥ Special No.:H-High conductive Brass
⑦ Material: N0-PA66 94V-0; N2-PA66 94V-2
⑧ Plating Category: SN-Bright Tin Plating
SW-Matte tin plating
⑨ Color: Blank-Natural Color
⑩ B: Numbering

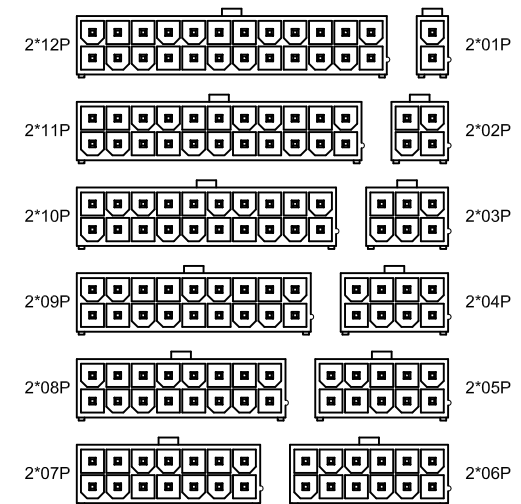

9357WV-2*XXH-N2SN-B	Nylon 66 UL 94V-2	High conductive Brass	Bright Tin	9357HM
9357WV-2*XXH-N2SW-B			Matte Tin	
9357WV-2*XXH-N0SN-B	Nylon 66 UL 94V-0		Bright Tin	
9357WV-2*XXH-N0SW-B			Matte Tin	
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL
TOLERANCE

.X ± 0.30
.XX ± 0.20
.XXX ± 0.10

PROJECT

ADZL 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2016/11/28

PART NO. 9357WV-2*XXH-XXXX-B

TITLE 4.20 mm Crimp Style Connectors

UNIT MM	SCALE 1:1	NUMBER A-053	REV B
------------	--------------	-----------------	----------

DATE

OLD REV

NEW REV

ECN

DESCRIPTION

CHECK

APPROVAL

PROJECT





Ken

Wisely He

Allen

2016/11/28

UNIT
MMSCALE
1:1NUMBER
A-053REV
B

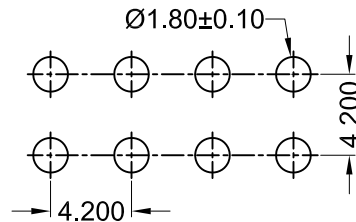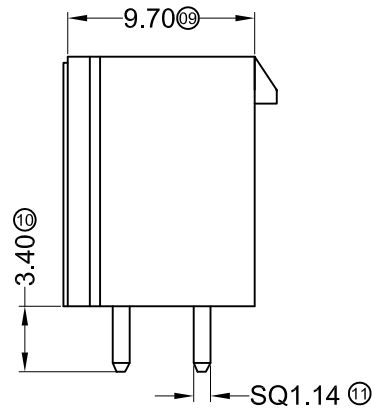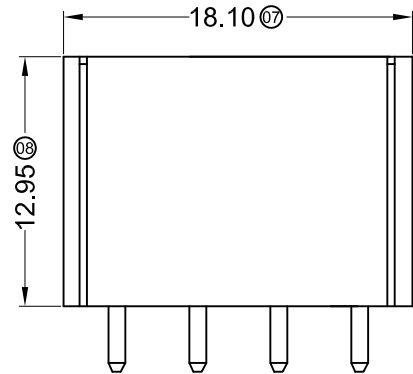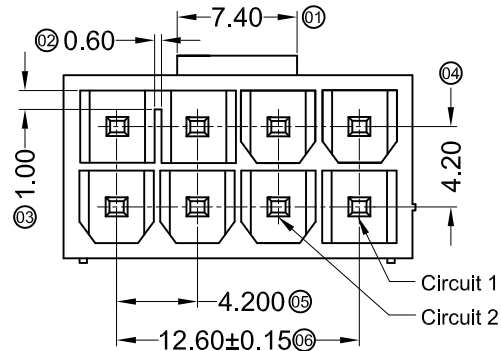

P.C.B Layout

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 7A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 W V X-2*04 EH1-N2 SN XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨






- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V- Straight 180°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*04-2*04P
⑥ Plug the Pin & Special No.:
EH1-interlinked hole With Big buckle
⑦ Material: N2-PA66 94V-2
⑧ Planting Category: SN-Bright tin plating
⑨ Color: Blank-Natural Color

9357WV-2*04EH1-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	9357H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD				PART NO. 9357WV-2*04EH1-N2SN			
												TITLE 4.20mm Crimp Style Connectors			
									APPROVAL	CHECK	DRAWN	DATA	UNIT MM	SCALE 1 : 1	NUMBER A-007
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Wisely He	Allen	2017/08/14				

RoHS  Lead-free

TEL:0769-82285488

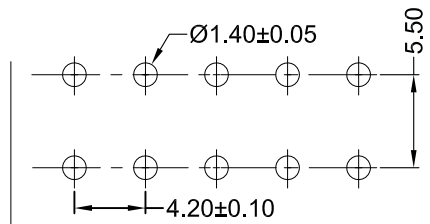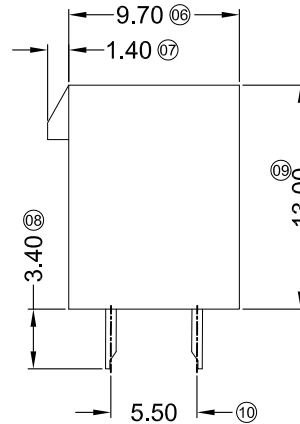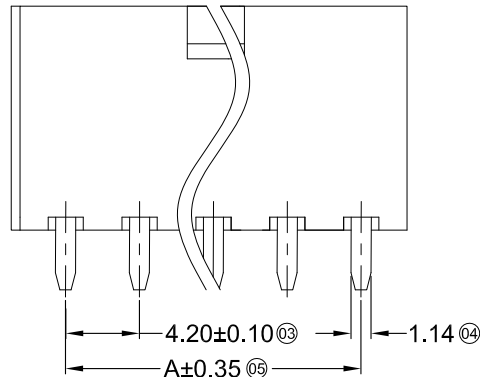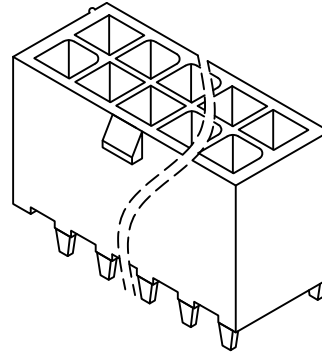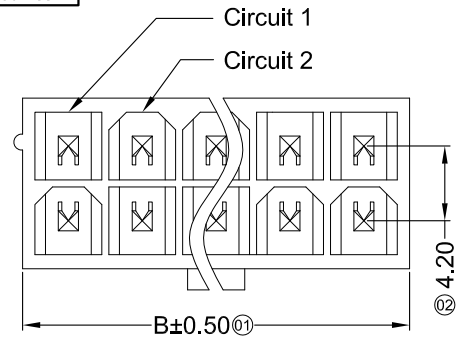


P.C.B. RECOMMENDED LAYOUT

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	---	5.60	2*07	25.20	30.80
2*02	4.20	9.80	2*08	29.40	35.00
2*03	8.40	14.00	2*09	33.60	39.20
2*04	12.60	18.20	2*10	37.80	43.40
2*05	16.80	22.40	2*11	42.00	47.60
2*06	21.00	26.60	2*12	46.20	51.80

Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

- 9357 W V X-2*XX HN-XX SN XX - B
- ①②③④⑤⑥⑦⑧⑨⑩
- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V-180°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-Double
⑥ Special NO.: HN-The hollow needle
⑦ Material: N0-PA66 94V-0 ; N2-PA66 94V-2
⑧ Planting Category: SN-Bright tin plating
SN1-Bright tin plating(Ni:50u"Min;Sn:100u"Min)
⑨ Color: Blank-natural color ; RD-dark red
⑩ 编号

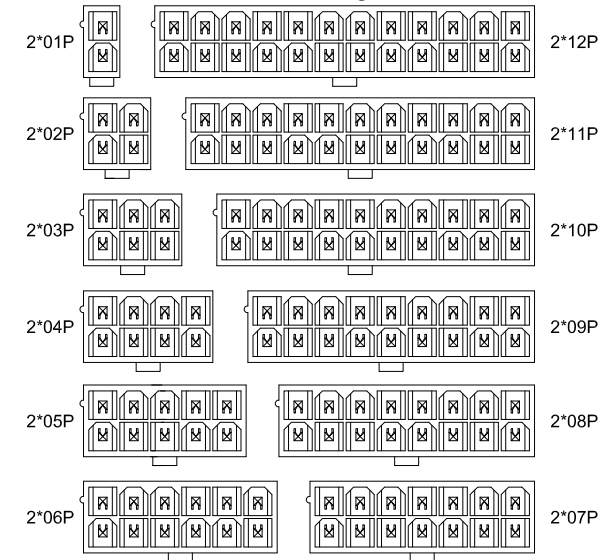

9357WV-2*XXHN-N2SN1-B	Nylon 66 UL 94V-2	Brass	Tin-Plated	9357H
9357WV-2*XXHN-N2SNRD-B	Nylon 66 UL 94V-2 Dark Red			
9357WV-2*XXHN-N2SN-B	Nylon 66 UL 94V-2			
9357WV-2*XXHN-N0SN-B	Nylon 66 UL 94V-0			
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL TOLERANCE

.X ± 0.30
.XX ± 0.20
.XXX ± 0.10

PROJECT 

 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2017/07/31

PART NO. 9357WV-2*XXHN-XXSN-B

TITLE 4.20mm Crimp Style Connectors





UNIT MM SCALE 1:1 NUMBER A-106 REV G

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 W V X-2*XX FS-XX XX XX -B

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: V-180°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-Double
⑥ Special NO.: FS-The hollow needle with positioning column
⑦ Material: N0-PA66 94V-0 ; N2-PA66 94V-2
⑧ Planting Category:
SN-Bright tin plating
△ G30-Contact area Gold plating:30u" min;
Tail area Bright tin plating
⑨ Color: Blank-natural color
⑩ B:Numbering

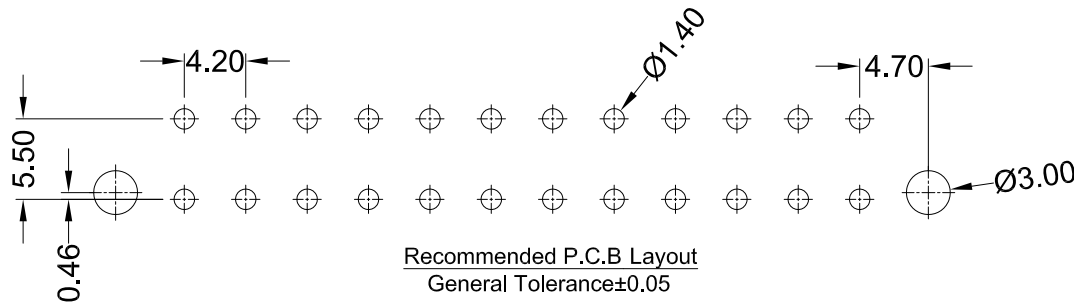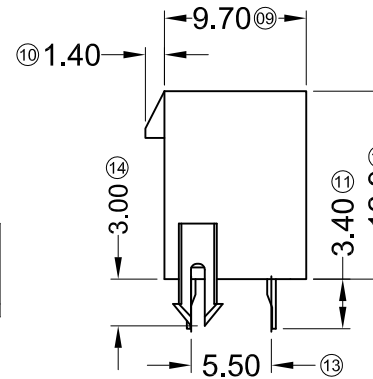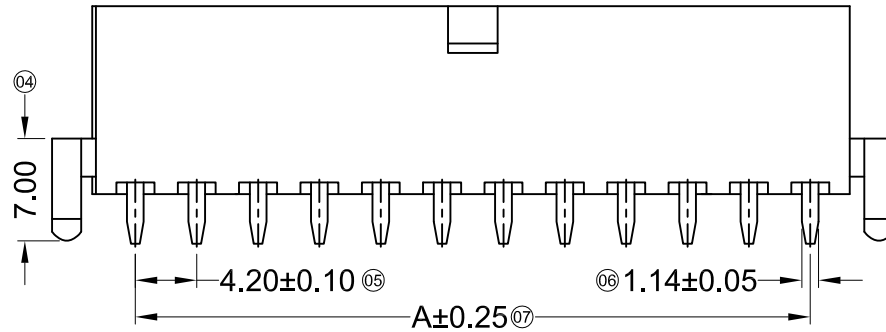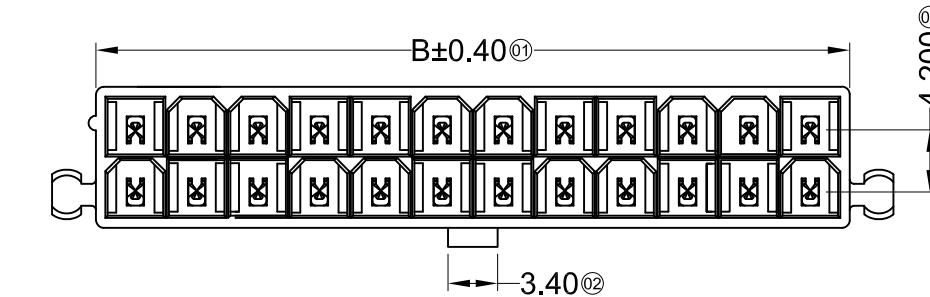

Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	—	5.60	2*07	25.20	30.80
2*02	4.20	9.80	2*08	29.40	35.00
2*03	8.40	14.00	2*09	33.60	39.20
2*04	12.60	18.20	2*10	37.80	43.40
2*05	16.80	22.40	2*11	42.00	47.60
2*06	21.00	26.60	2*12	46.20	51.80

△ 9357WV-2*XXFS-N0G30-B	Nylon 66 UL 94V-2	Brass	Tin-Plated	9357H
9357WV-2*XXFS-N2SN-B	Nylon 66 UL 94V-2			
9357WV-2*XXFS-N0SN-B	Nylon 66 UL 94V-0			
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL
TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10

 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

PART NO. 9357WV-2*XXFS-XXXX-B

TITLE 4.20mm Crimp Style Connectors

PROJECT





APPROVAL	CHECK	DRAWN	DATA
Ken	Wisely He	Allen	2017/07/31

UNIT MM	SCALE 1:1	NUMBER A-106	REV C
------------	--------------	-----------------	----------

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

RoHS

TEL:0769-82285488

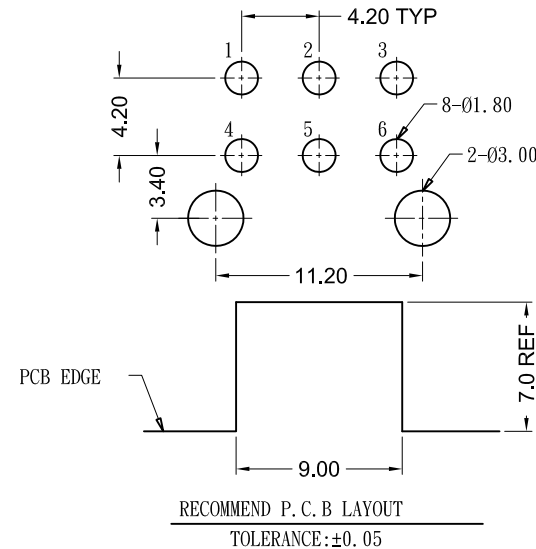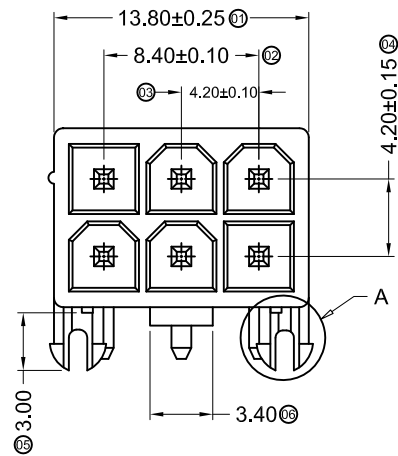



■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

9357 W R X-2*03 SE-LP SW XX H

(1) (2) (3) (4) (5) (6) (7) (8) (9)

- ① Series No.
- ② Category: W-wafer
- ③ Welding Board Angle: R- Right Angle 90°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: 2*03-2*03P
- ⑥ Plug the Pin & Special No.:
SE-With Post, Reversrd Lock,
the 5th Pin Foolproof
- ⑦ Material: LP-LCP 94V-0
- ⑧ Planting Category: SW-Matte tin plating
- ⑨ Color: Blank-Natural Color Black
- ⑩ Blank-Brass H-High conductive Brass

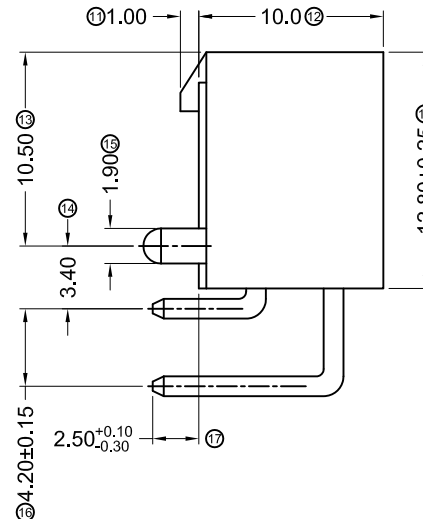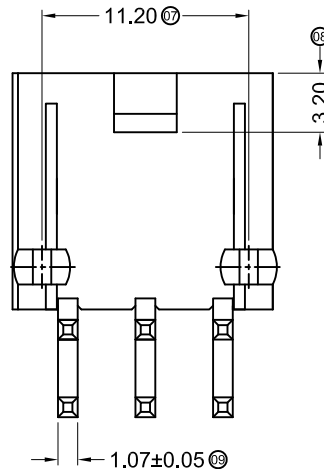

9357WR-2*03SE-LPSWH	LCP UL 94V-0	High conductive Brass	Matte tin Plating	9357H
9357WR-2*03SE-LPSW		Brass		
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

PROJECT

ADZL 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2018/01/26

PART NO.

9357WR-2*03SE-LPSWX

TITLE




4.20 mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1:1	A-000	F

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

RoHS

TEL:0769-82285488

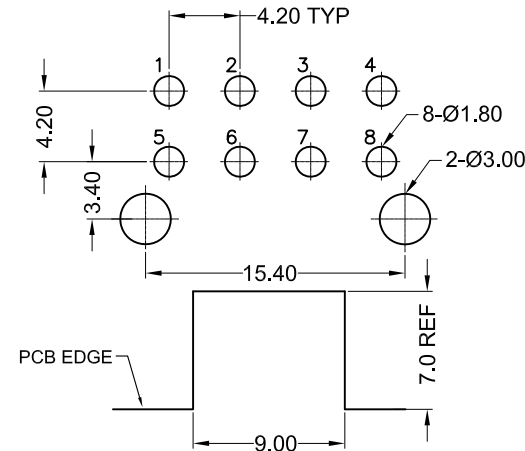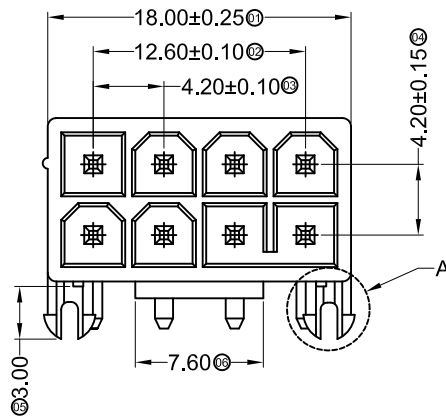



Recommended P.C.B Layout
General Tolerance±0.05

Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 W R X-2*04 FH-LP SW XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: R- Right Angle 90°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*04-2*04P
⑥ Plug the Pin & Special No.:
FH-Mounting peg with linked holes,
With Post,Reversrd Lock,
⑦ Material: LP-LCP 94V-0
⑧ Planting Category: SW-Matte tin plating
⑨ Color: Blank- Black;NC-Natural Color

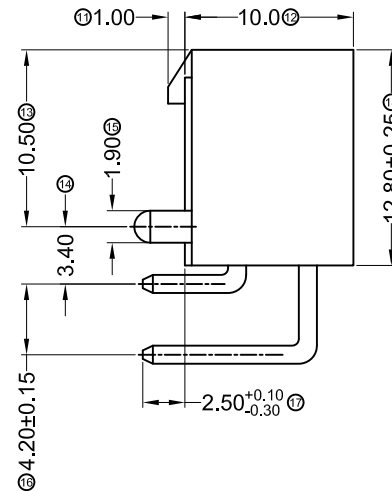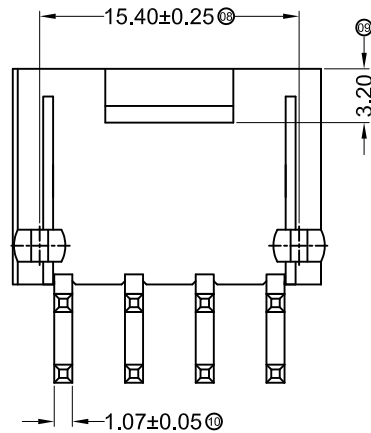

9357WR-2*04FH-LPSW	LCP UL 94V-0 (halogen free)	Brass	MatteTin-Plated	9357H
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL
TOLERANCE

.X ±0.30
.XX ±0.20
.XXX ±0.10

PROJECT



思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2018/06/25

PART NO.
9357WR-2*04FH-LPSW





TITLE
4.20 mm Crimp Style Connectors

UNIT MM	SCALE 1:1	NUMBER A-000	REV D
------------	--------------	-----------------	----------

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

RoHS

TEL:0769-82285488

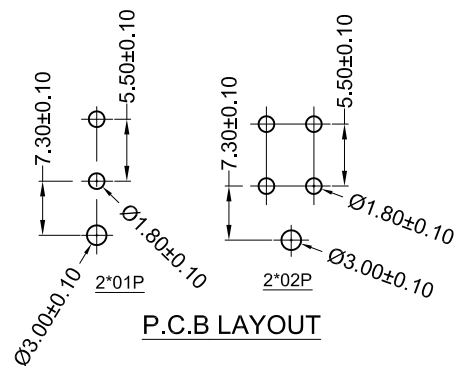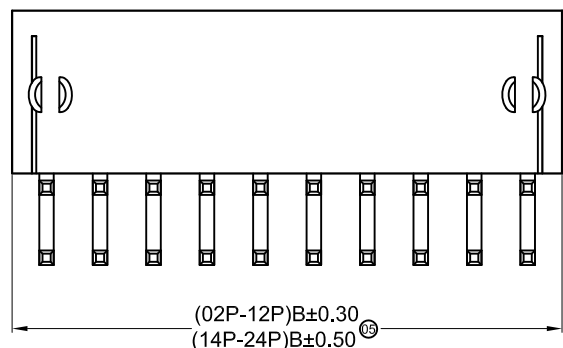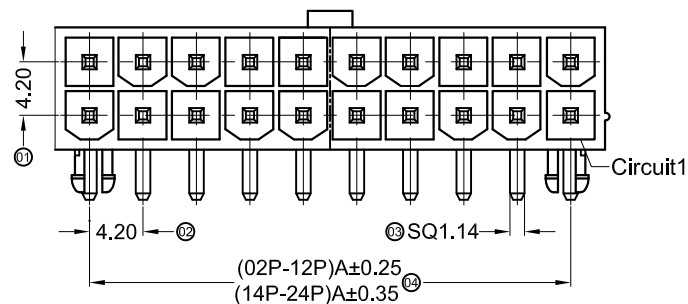

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing : $\leq 20\text{m}\Omega$

9357 W R X-2*XX SX-XX SN XX -A

01	02	03	04	05	06	07	08	09	10
----	----	----	----	----	----	----	----	----	----

① Series No.

02 Category: W-wafer

③ Welding Board Angle: R-90°

④ Welding Way: Blank-DIP ;

⑤ Row No.-Pin No.: 2*XX-Double row

06 Special NO.

S-With positioning column F-halogen free

⑦ Material: N0-PA66 94V-0 ; N2-PA66 94V-2 ;



© Material: L

⑧ Planting Category: SN-Bright tin plating 70u"

⑨ Color: Blank-natural color

Color: Blank-Natural color
BK-BLACK BL-BLUE RE-RED



⑩ A-Numbering

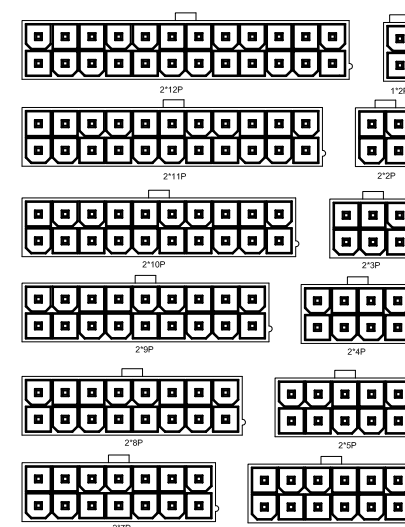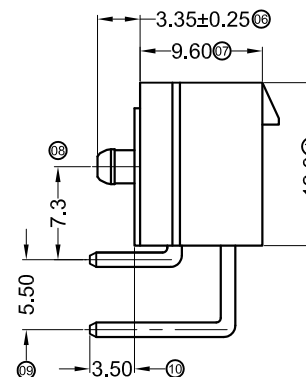

Poles	Dimensions(mm)	
	A	B
2*01	—	5.40
2*02	4.20	9.60
2*03	8.40	13.80
2*04	12.60	18.00
2*05	16.80	22.20
2*06	21.00	26.40
2*07	25.20	30.60
2*08	29.40	34.80
2*09	33.60	39.00
2*10	37.80	43.20
2*11	42.00	47.40
2*12	46.20	51.60



9357WR-2*XXS-LPSN-A	LCP UL 94V-0	Brass	Tin-Plated	9357H
9357WR-2*XXSF-N0SNBK-A	Nylon 66 UL 94V-0 Halogen Free			
9357WR-2*XXS-N0SNXX-A	Nylon 66 UL 94V-0			
9357WR-2*XXS-N2SNXX-A	Nylon 66 UL 94V-2			
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD	PART NO. 9357WR-2*XXS-XXSN-A						
									TITLE 4.20mm Crimp Style Connectors						
						APPROVAL			CHECK	DRAWN	DATA				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	 PROJECT	Ken	Wisely He	Allen	2017/08/01	UNIT MM	SCALE 1 : 1	NUMBER A-053	REV F

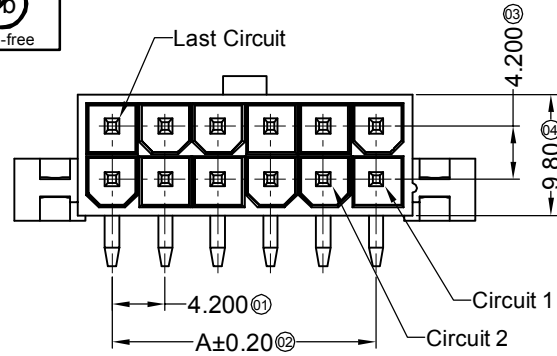

Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

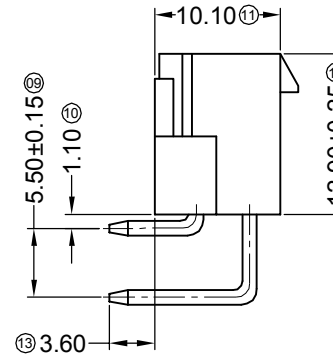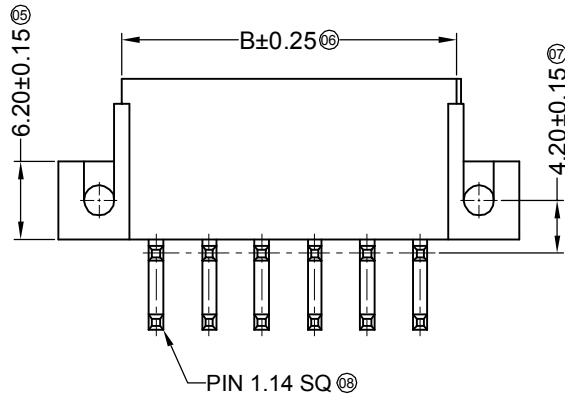


9357 W R X-2*XX ES-XX SN XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
 ② Category: W-wafer
 ③ Welding Board Angle: R-Right Angle 90°
 ④ Welding Way: Blank-DIP
 ⑤ Row No.-Pin No.: 2*XX-2*01P~2*12P
 ⑥ Plug the Pin & Special No.:
 ES-With Ears and Screw Holes
 ⑦ Material: N0-PA66 94V-0 ; N2-PA66 94V-2
 ⑧ Planting Category: SN-Bright tin plating
 ⑨ Color: Blank-Natural Color

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	---	5.40	2*07	25.20	30.60
2*02	4.20	9.60	2*08	29.40	34.80
2*03	8.40	13.80	2*09	33.60	39.00
2*04	12.60	18.00	2*10	37.80	43.20
2*05	16.80	22.20	2*11	42.00	47.40
2*06	21.00	26.40	2*12	46.20	51.60

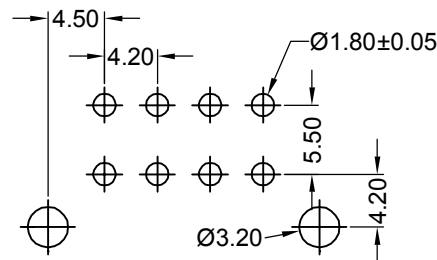

Recommended P.C.B. Layout
 General Tolerance±0.10

9357WR-2*XXES-N0SN	Nylon 66 UL 94V-0	Brass	Tin-Plated	9357H
9357WR-2*XXES-N2SN	Nylon 66 UL 94V-2	Brass	Tin-Plated	
PART N0	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL TOLERANCE
 X ±0.30
 .XX ±0.20
 .XXX ±0.10

 东莞市思量连接器有限公司
 DONGGUAN ADZL CONNECTORS CO.,LTD

PART NO. 9357WR-2*XXES-XXSN

TITLE 4.20 mm Crimp Style Connectors

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2018/06/19

UNIT MM SCALE 1:1 NUMBER A-053 REV B

PROJECT 






DATE OLD REV NEW REV ECN DESCRIPTION CHECK APPROVAL

■ Specifications :


- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

9357 W R X - 2*XX X - XX XX XX -A

- ① Series No.
② Category: W-wafer
③ Welding Board Angle: R-90°
④ Welding Way: Blank-DIP
⑤ Row No.-Pin No.: 2*XX-Double
⑥ Plug the Pin & Special NO.: F-HF
⑦ Material: N0-PA66 94V-0; N2-PA66 94V-2
⑧ Planting Category:
V:All Gold-Plated *01-Gold Flash;
SN-Bright tin plating 70u"
⑨ Color:
Blank-Natural Color BK-Black
⑩ A:Numbering

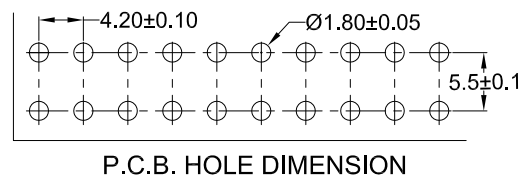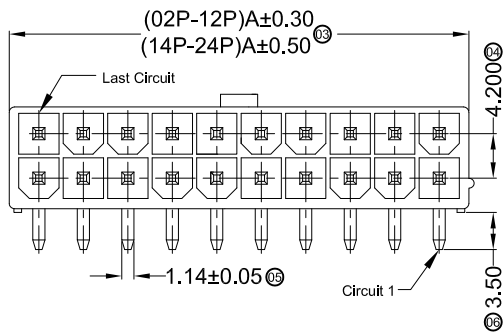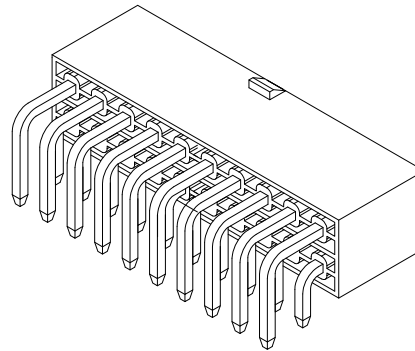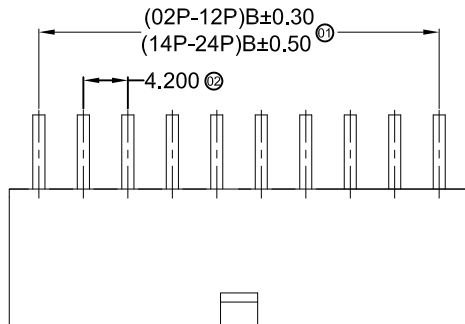

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	5.60	---	2*07	30.80	25.20
2*02	9.80	4.20	2*08	35.00	29.40
2*03	14.00	8.40	2*09	39.20	33.60
2*04	18.20	12.60	2*10	43.40	37.80
2*05	22.40	16.80	2*11	47.60	42.00
2*06	26.60	21.00	2*12	51.80	46.20

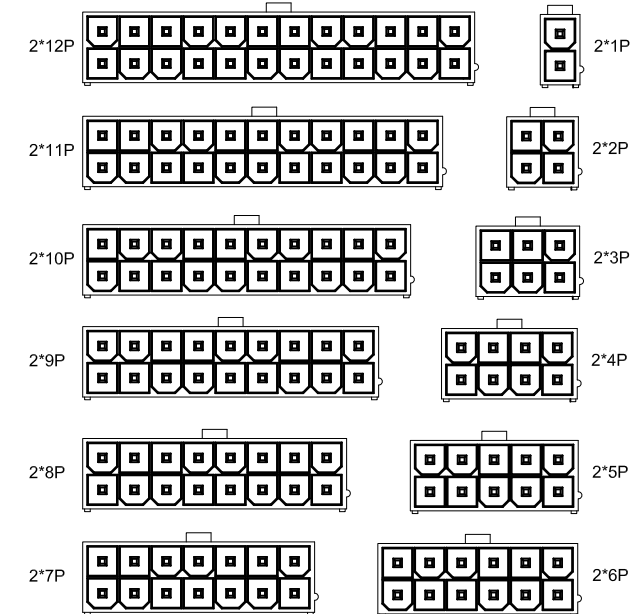

9357WR-2*XXX-N0V01XX-A	Nylon 66 UL 94V-0	Brass	Gold-Flash	9357H
9357WR-2*XXX-N0SNXX-A	Nylon 66 UL 94V-0	Brass	Tin-Plated	
9357WR-2*XXX-N2V01XX-A	Nylon 66 UL 94V-2	Brass	Gold-Flash	
9357WR-2*XXX-N2SNXX-A	Nylon 66 UL 94V-2	Brass	Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL
TOLERANCE.X ±0.30
.XX ±0.20
.XXX ±0.10 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2017/05/03

PART NO. 9357WR-2*XXX-XXXX-A

TITLE
4.20mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1:1	A-053	G

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

















Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 H M-2*XX XX-XX XX
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: H-HSG
③ Welding Board Angle: M-Male HSG
④ Row No.-Pin No.: 2*XX-2*01P~2*12P
⑤ Plug the Pin & special No.:
⑥ Material: N0-PA66 94V-0; N2-PA66 94V-2
⑦ Color: Blank-Natural Color ; BK-Black

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01		5.50	2*07	25.20	30.70
2*02	4.20	9.70	2*08	29.40	34.90
2*03	8.40	13.90	2*09	33.60	39.10
2*04	12.60	18.10	2*10	37.80	43.30
2*05	16.80	22.30	2*11	42.00	47.50
2*06	21.00	26.50	2*12	46.20	51.70

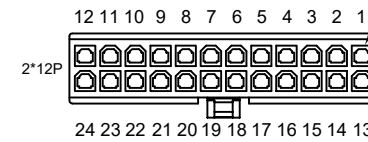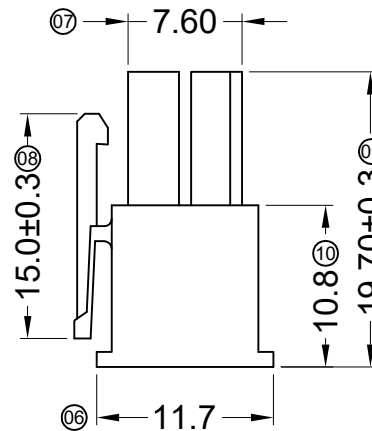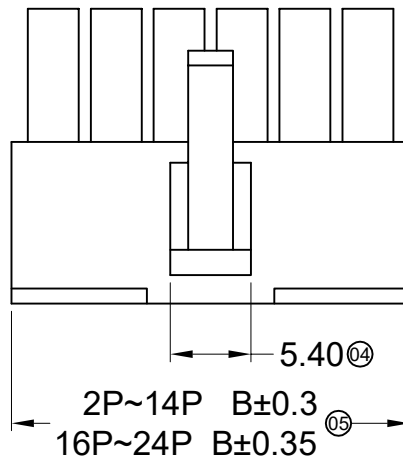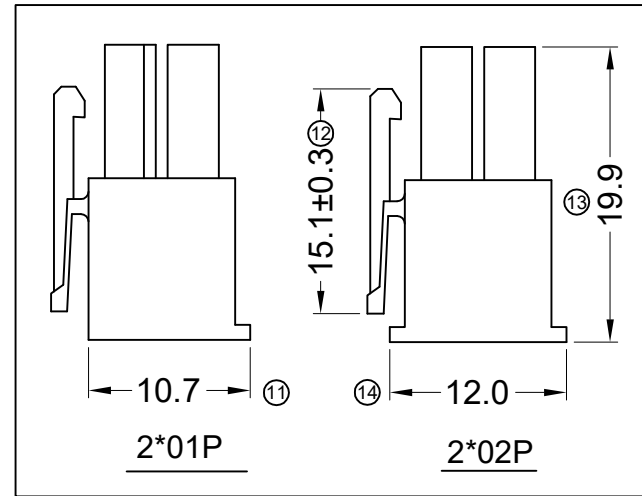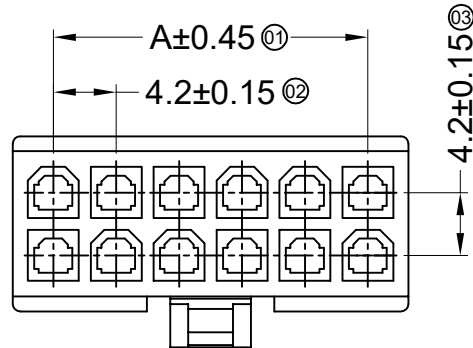

9357HM-2*XX-N2BK	Nylon 66 94V-2 Black	9357TF	9357W Or 9357H
9357HM-2*XX-LP	LCP 94V-0		
9357HM-2*XX-N2	Nylon 66 94V-2		
9357HM-2*XX-N0	Nylon 66 94V-0		
PART NO	Material	Suitable ADZL Terminal	Mates With ADZL Wafer Or Housing

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10

 东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA


Ken Wisely He Allen 2020/05/16

PART NO. 9357HM-2*XX-XX

TITLE 4.20mm Crimp Style Connectors

UNIT MM SCALE 1:1 NUMBER REV

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL
------	---------	---------	-----	-------------	-------	----------

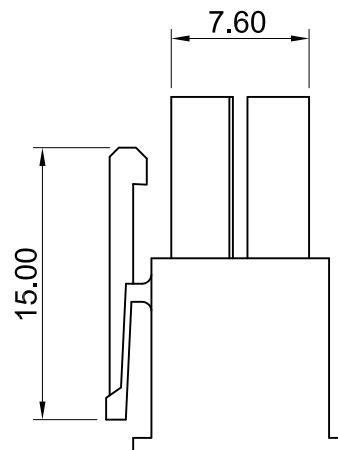

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD	PART NO. 9357HM-2*04E-N2						
									TITLE 4.20 mm Crimp Style Connectors						
									APPROVAL	CHECK	DRAWN	DATA			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	 PROJECT	Ken	Wisely He	Allen	2017/07/31	UNIT MM	SCALE 1 : 1	NUMBER A-011	REV D

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing : $\leq 20m\Omega$

9357 H M-2*04 C-N2 XX

①	②	③	④	⑤	⑥	⑦
---	---	---	---	---	---	---


- ① Series No
② Category: H-HSG
③ Welding Board Angle :
Blank-Ordinary
M-Male housing
④ Row No.-Pin No.:
2*XX-Double Row
⑤ Special No:
C- Group Type
⑥ Material:
N2-PA66 94V-2
⑦ Color :
Blank-Natural Color

9357HM-2*04C-N2	Nylon 66 94V-2	9357TF	9357W Or 9357H
PART NO	Material	Suitable ADZL Terminal	Mates With ADZL Wafer Or Housing

GENERAL
TOLERANCE

X	± 0.30
.XX	± 0.20
.XXX	± 0.10

PROJECT



 东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2020/08/09

PART NO. 9357HM-2*04C-N2



TITLE 4.20 mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1:1	A-011	C

加2P (防呆)




特殊

6+2P组合

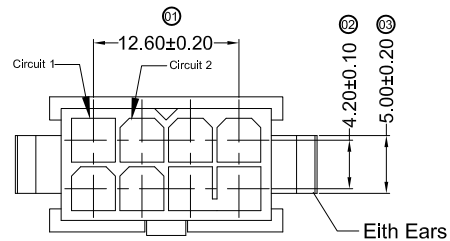


■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 10m\Omega$
- After environmental testing: $\leq 20m\Omega$

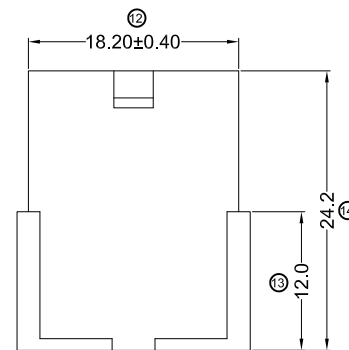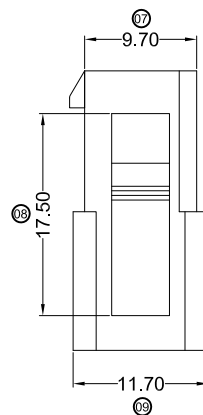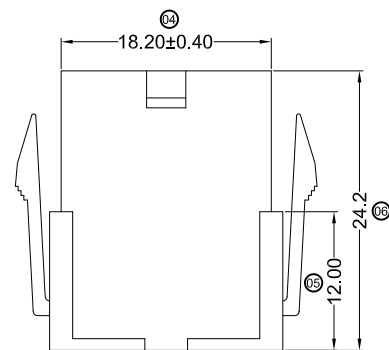

Without Ears

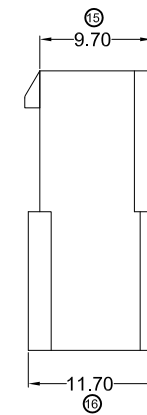


9357 H F-2*04 XE-N2 XX

① ②③ ④ ⑤ ⑥ ⑦









- ① Series No
- ② Category:
H-HSG
- ③ Welding Board Angle:
Blank-Ordinary
F-Female housing
- ④ Row No.-Pin No.:
XX-Single Row
- ⑤ Special No.:
G-With Wings
I-Without Wings
E-Communication Pore
- ⑥ Material:
N2-PA66 94V-2
- ⑦ Color :
Blank-Natural Color

9357HF-2*04IE-N2	Nylon 66 94V-2	9357TM	9357W Or 9357H	Without Eats
9357HF-2*04GE-N2			9357W Or 9357H	With Eats
PART N0	Material	Suitable ADZL Terminal	Mates With ADZL Wafer Or Housing	Note

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD	PART NO. 9357HF-2*04XE-N2						
									TITLE 4.20 mm Crimp Style Connectors						
									APPROVAL	CHECK	DRAWN	DATA			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Wisely He	Allen	2007/05/03	UNIT MM	SCALE 1 : 1	NUMBER A-106	REV D

RoHS

TEL:0769-82285488

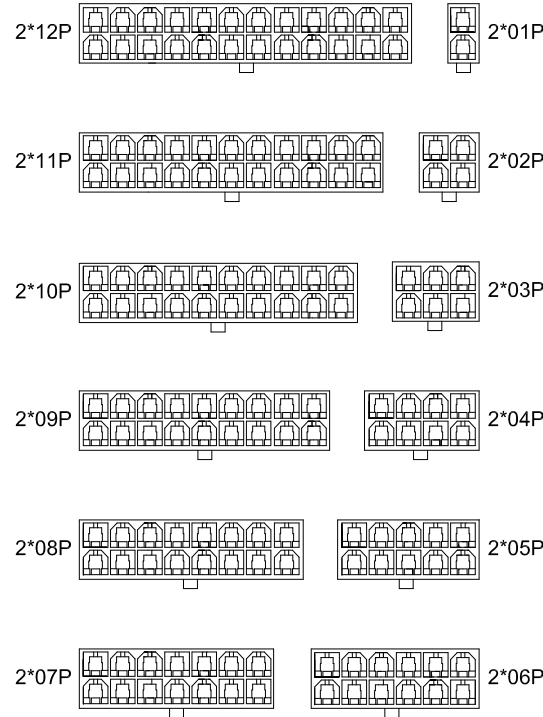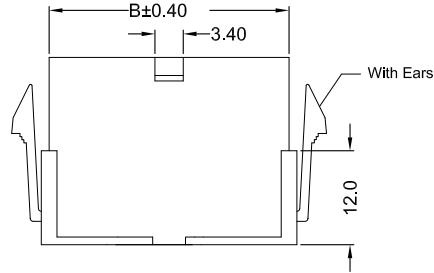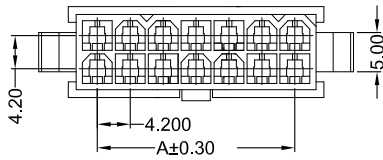

Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 H F-2*XX X-XX XX
① ②③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: H-HSG
③ Welding Board Angle: F-Female
④ Row No.-Pin No.: 2*XX-2*01P~2*12P
⑤ Plug the Pin & special No. :
I-Without the Wing; G-With the Wing
⑥ Material: N0-PA66 94V-0; N2-PA66 94V-2
⑦ Color : Blank-Natural Color
BK-Black

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
2*01	—	5.60	2*07	25.20	30.80
2*02	4.20	9.80	2*08	29.40	35.00
2*03	8.40	14.00	2*09	33.60	39.20
2*04	12.60	18.20	2*10	37.80	43.40
2*05	16.80	22.40	2*11	42.00	47.60
2*06	21.00	26.60	2*12	46.20	51.80

9357HF-2*XXI-N2BK	Nylon 66 94V-2 Black	9357TM	9357W Or 9357H	Without Ears
9357HF-2*XXG-N2	Nylon 66 94V-2			With Ears
9357HF-2*XXI-N2	Nylon 66 94V-2			Without Ears
9357HF-2*XXG-N0	Nylon 66 94V-0			With Ears
9357HF-2*XXI-N0	Nylon 66 94V-0			Without Ears
PART N0	Material	Suitable ADZL Terminal	Mates With ADZL Wafer Or Housing	Note

GENERAL TOLERANCE
.X ±0.30
.XX ±0.20
.XXX ±0.10

ADZL 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

PART NO. 9357HF-2*XXX-XX





TITLE 4.20 mm Crimp Style Connectors

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2017/05/03

UNIT MM SCALE 1:1 NUMBER A-007 REV A

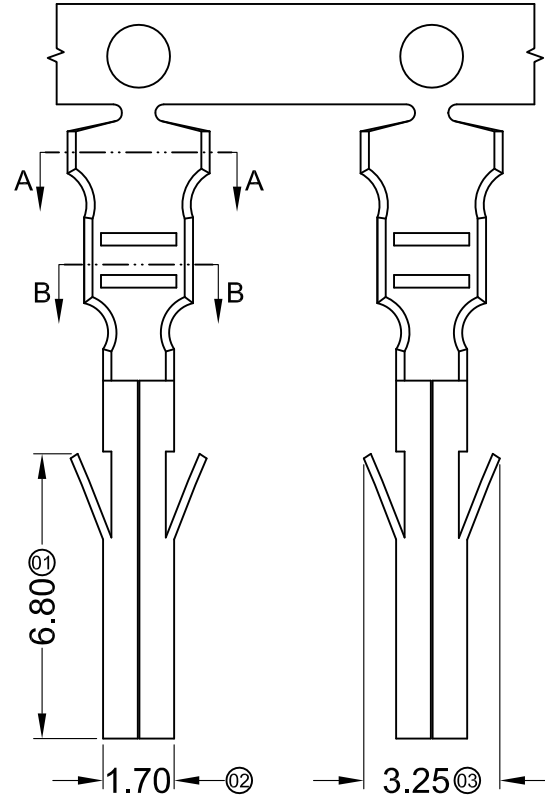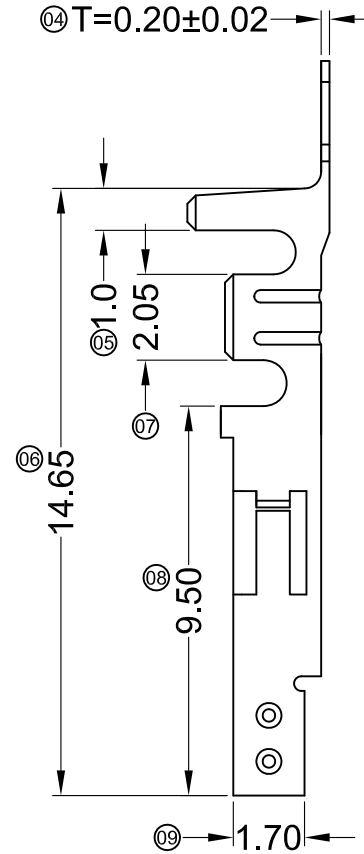

SECTION: A-A
SCALE: 1:1SECTION: B-B
SCALE: 1:1

■ Specifications :





- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 T F-X SN X-L
① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
- ② Category: T-terminal
- ③ Shape: F-Female
- ④ Material: B-Brass; P-Phosphor Bronze
- ⑤ Plating style: SN-Bright tin plating
- ⑥ Plating method:
Blank-Stamping before plating;
- ⑦ Special No: L-Normal Leads

9357TF-BSN-L	Brass	AWG#18-24	2.10mm(Max)	Stamping Before Plating :30u" MIN. Ni70u"Sn MIN.	9357HM
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD	PART NO. 9357TF-XSN-L						
									TITLE 4.20 mm Crimp Style Connectors						
									APPROVAL	CHECK	DRAWN	DATA			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Wisely He	Allen	2017/03/18	UNIT MM	SCALE 1 : 1	NUMBER A-053	REV C

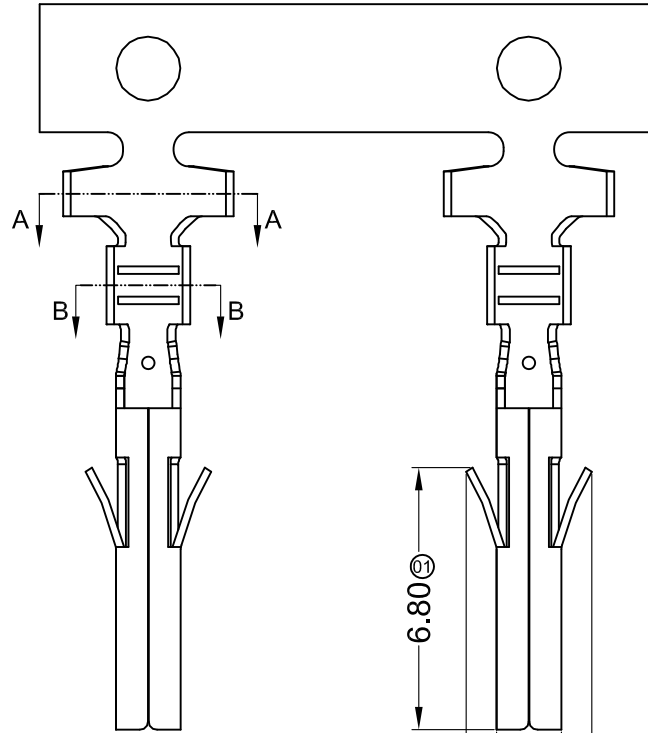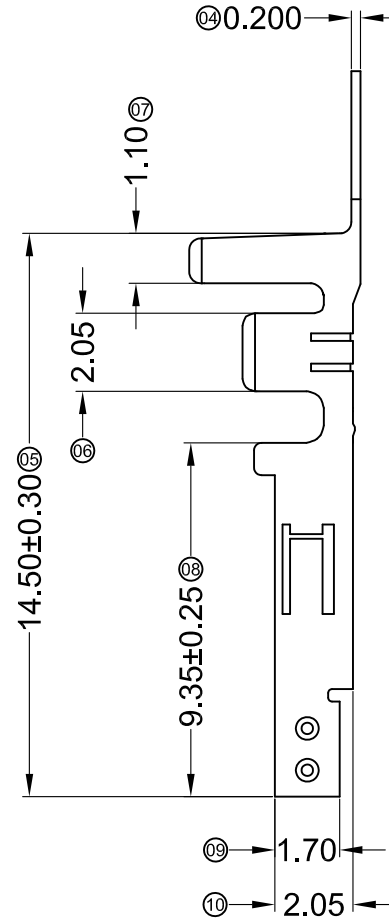SECTION: A-A
SCALE: 1:1SECTION: B-B
SCALE: 1:1

■ Specifications :

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

9357 T F-X SN X-H

① ② ③ ④ ⑤ ⑥ ⑦


- ① Series Number
- ② Category: T-terminal
- ③ Shape: F-Female
- ④ Material: B-Brass; P-Phosphor Bronze
- ⑤ Plating style: SN-Bright tin plating
- ⑥ Plating method:
Blank-Stamping before plating;
- ⑦ Special No: H-High Leads

9357TF-BSN-H	Brass	AWG#16-24	3.10mm(Max)	Stamping Before Plating :30u" MIN. Ni;70u"Sn MIN.	9357HM
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD	PART NO. 9357TF-BSN-H						
						APPROVAL			CHECK	DRAWN	DATA	TITLE 4.20 mm Crimp Style Connectors			
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL		PROJECT 	Ken	Wisely He	Allen	2017/03/18	UNIT MM	SCALE 1 : 1	NUMBER A-053

RoHS

TEL:0769-82285488

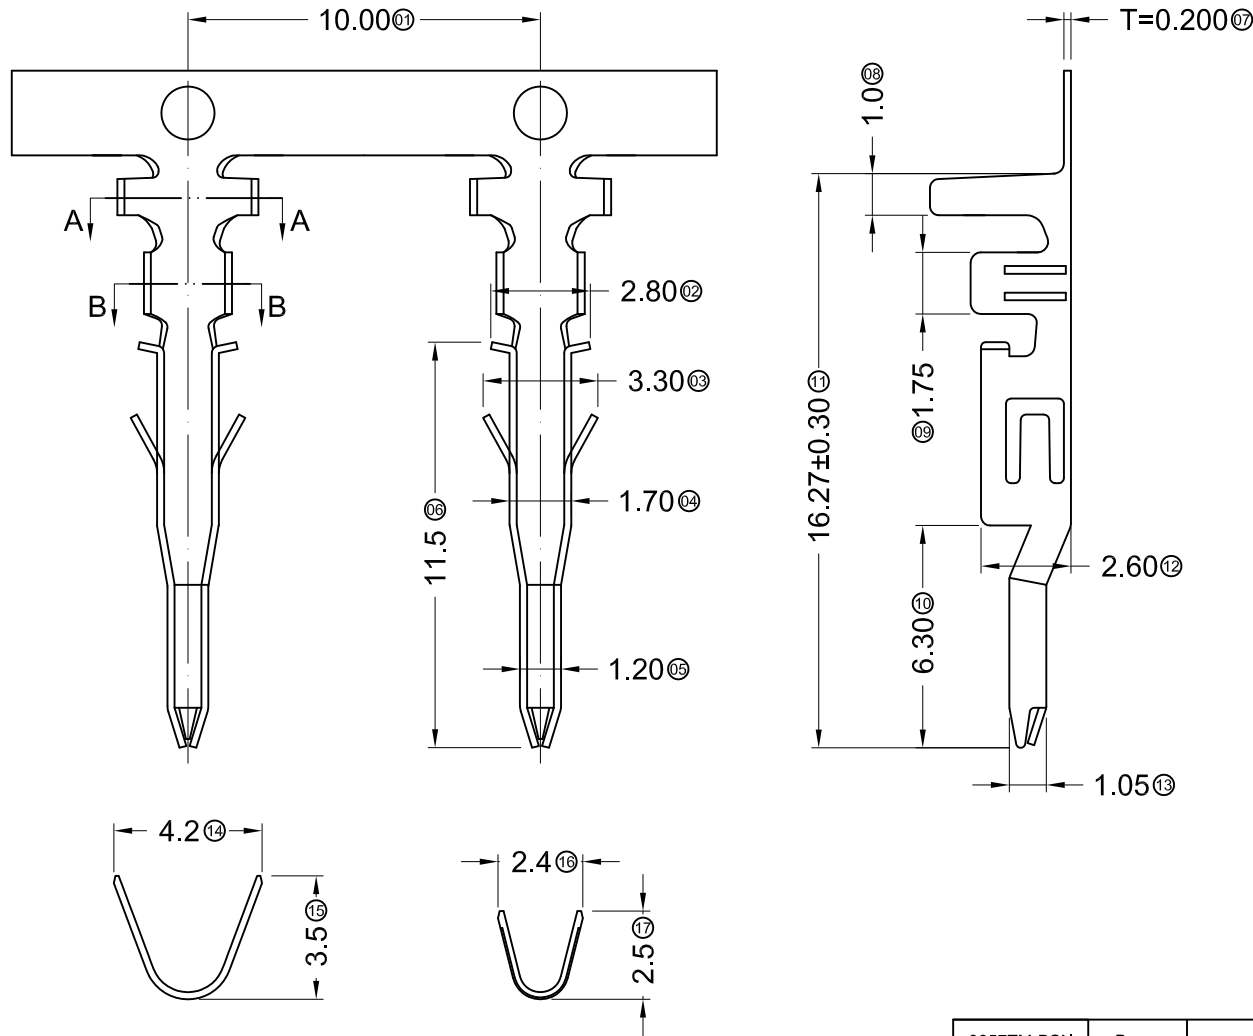**Specifications :**

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

9357 T M-X SN X-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Category: T-Terminal
- ③ Appearance type: M-Male Terminal
- ④ Material: B-Brass; P-Phosphor Bronze
- ⑤ Plating Style: SN-Bright Tin Plating
- ⑥ Plating Method :
Blank-Stamping before Plating
- ⑦ Mold N0/MARK&Special N0
L-Normal Leads

SECTION: A-A

SCALE: 1:1

SECTION: B-B

SCALE: 1:1

9357TM-BSN	Brass	AWG#18-22	3.00mm(Max)	Stamping Before Plating:30u" Ni;70u"Sn	9357HF
PART N0	Material	Wire Range	Insulation O.D.	Finish	Used In ADZL Housing

GENERAL
TOLERANCE.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

PART NO. 9357TM-XSN

TITLE 4.20 mm Crimp Style Connectors

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2017/03/16


UNIT MM	SCALE 1:1	NUMBER A-053	REV A
------------	--------------	-----------------	----------

PROJECT



RoHS

TEL:0769-82285488

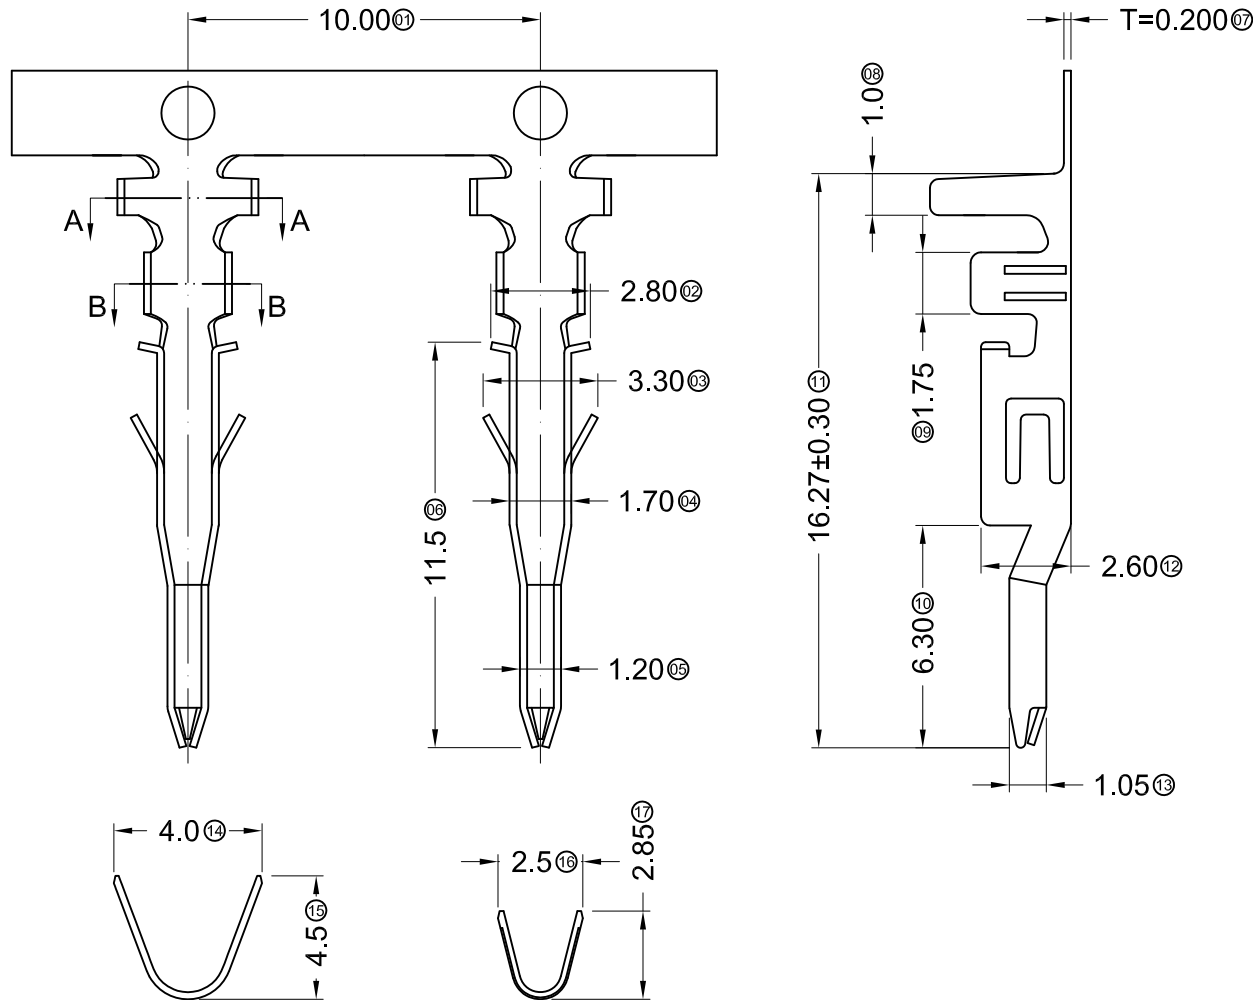**Specifications :**

- Voltage rating: 600V AC / DC
- Current rating: 9A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000\text{M}\Omega$
- Contact resistance: $\leq 10\text{m}\Omega$
- After environmental testing: $\leq 20\text{m}\Omega$

9357 T M-X SN X-X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: T-Terminal
③ Appearance type: M-Male Terminal
④ Material: B-Brass; P-Phosphor Bronze
⑤ Plating Style: SN-Bright Tin Plating
⑥ Plating Method :
Blank-Stamping before Plating
⑦ Mold N0/MARK&Special N0
L-Normal Leads
H-High feet

SECTION: A-A

SCALE: 1:1

SECTION: B-B

SCALE: 1:1

9357TM-BSN-H	Brass	AWG#16-22	3.10mm(Max)	Stamping Before Plating:30u" Ni;70u"Sn	9357HF
PART N0	Material	Wire Range	Insulation O.D.	Finish	Used In ADZL Housing

GENERAL
TOLERANCE.X ± 0.30 .XX ± 0.20 .XXX ± 0.10 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

PART NO.

9357TM-XSN-H

TITLE

4.20 mm Crimp Style Connectors

APPROVAL

Ken

CHECK

Wisely He

DRAWN

Allen

DATA

2017/03/16

UNIT

MM

SCALE

1:1

NUMBER

A-053

REV

A

PROJECT

